



(43) International Publication Date
29 September 2005 (29.09.2005)

PCT

(10) International Publication Number
WO 2005/090776 A1

(51) International Patent Classification⁷: F02M 61/14,
69/04, F02D 41/30, 41/40

[JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, of1, Toyota-cho, Toyota-shi, Aichi-ken, 471-8571 (JP).

(21) International Application Number: PCT/IB2005/000599

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 10 March 2005 (10.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004-072731 15 March 2004 (15.03.2004) JP

(71) Applicant (for all designated States except US): TOYOTA JIDOSHA KABUSHIKI KAISHA [JP/JP]; 1, Toyota-cho, Toyota-shi, Aichi-Ken, 471-8571 (JP).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,


(72) Inventor; and

(75) Inventor/Applicant (for US only): IRISAWA Yasuyuki

[Continued on next page]

(54) Title: FUEL INJECTION APPARATUS AND FUEL INJECTION CONTROL METHOD FOR INTERNAL COMBUSTION ENGINE

(57) Abstract: A fuel injection apparatus and a fuel injection control method for an internal combustion engine (10) which performs a direct injection operation for injecting fuel from an injector' for cylinder injection (33) into a cylinder and a port injection operation for injecting fuel from an injector for intake port injection (31) into an intake port (13). When a request to change from fuel injection from the injector for cylinder injection (33) to fuel injection from the injector for intake port injection (31) is made, the fuel injection mode is set to a fuel injection mode which can be set for a particular cylinder according to a point of time at which the changing request is made for the particular cylinder. Accordingly, transition to the optimum fuel injection mode is performed in a short time, and a required amount of air-fuel mixture can be obtained. It is therefore possible to suppress fluctuation of torque and deterioration of emission.

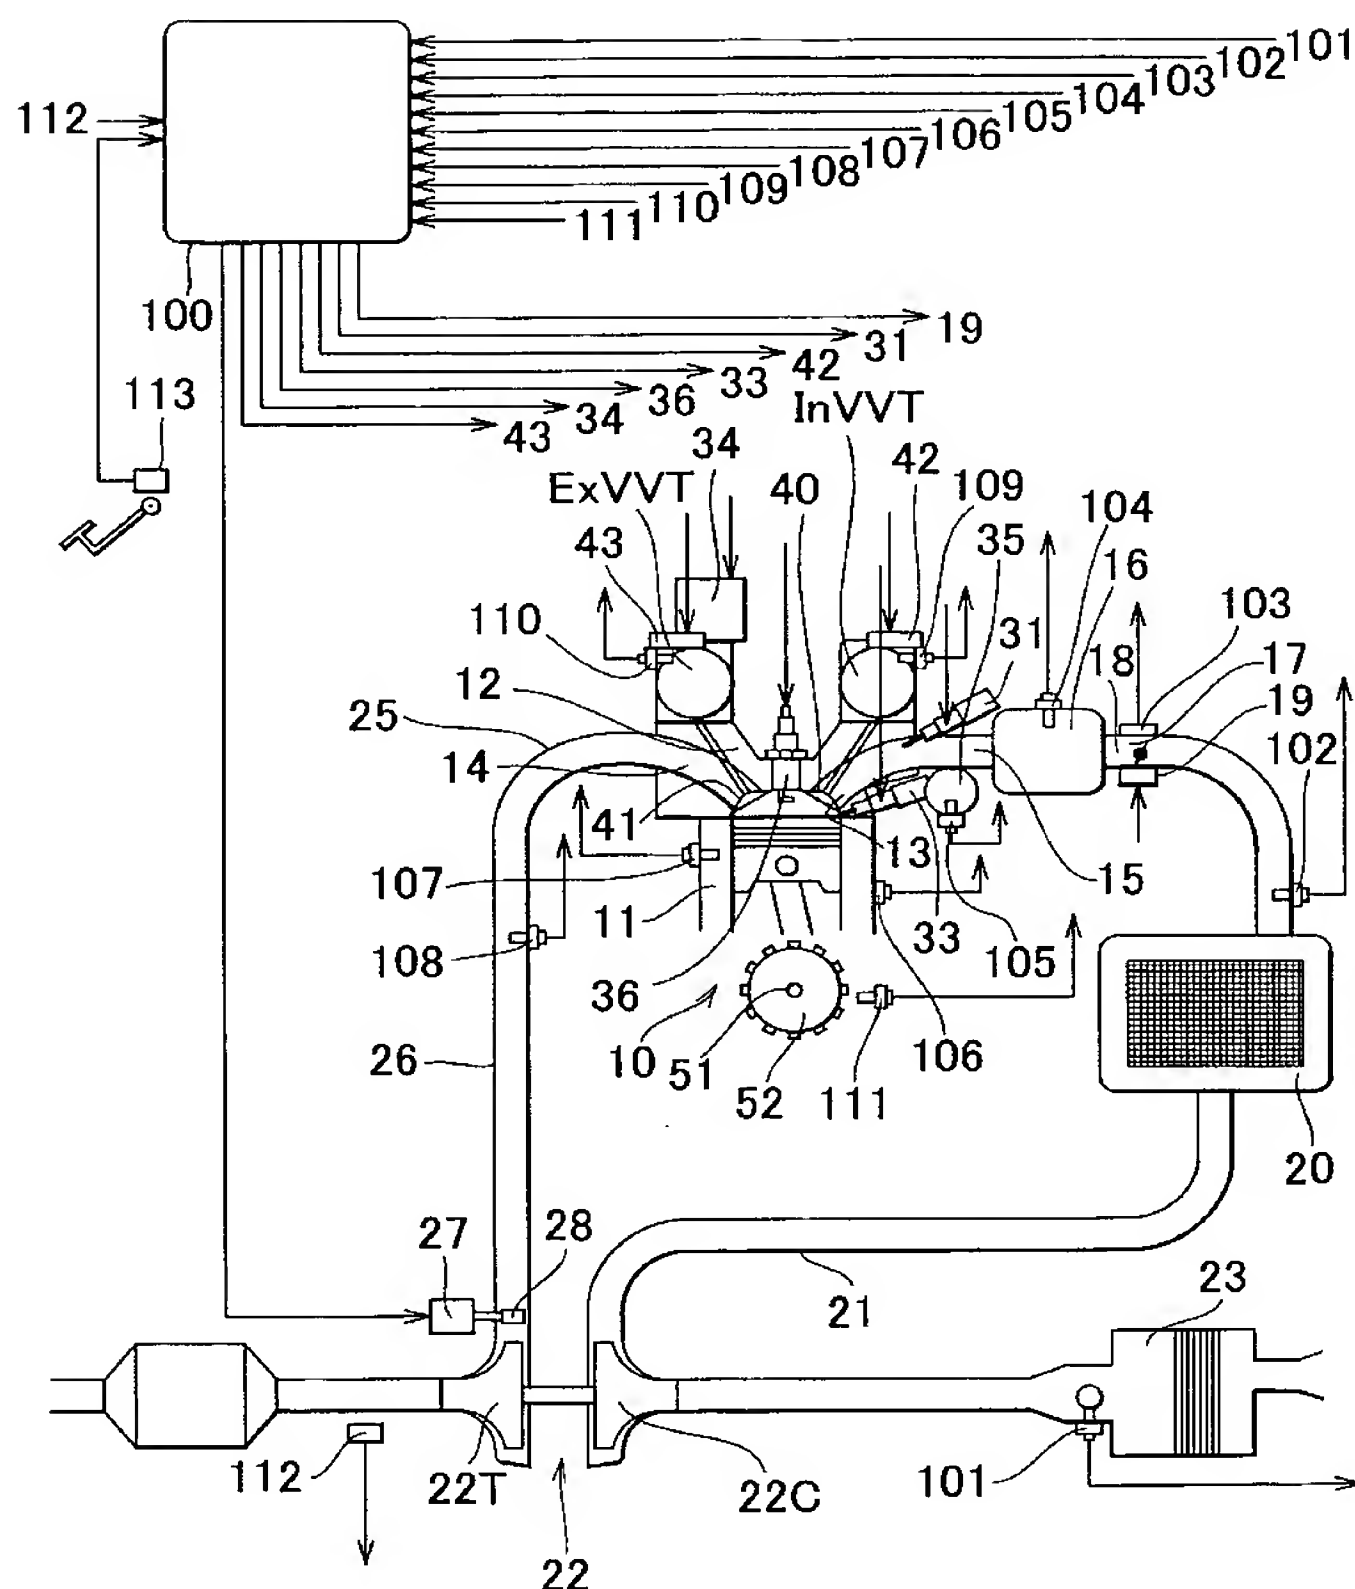



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*